



Safety laser scanners
S3000 PROFINET IO Advanced, Sensor head with
I/O module

S30A-4111CP



Model Name > [S30A-4111CP](#)
Part No. > [1045650](#)



At a glance

- Direct integration in PROFINET IO safe bus system
- 4 m protective field range
- Four switchable field sets (four protective fields, four warning fields)
- Remote diagnostics and configuration through safety controller
- Managed 2-port switch for RJ45 plug connector
- Configuration memory integrated in the system plug
- Simultaneous monitoring of two protective fields

Your benefits

- Reliable, fault-tolerant communication with PLC controller using state-of-the-art fiber-optic technology.
- Efficient, cost-effective protection - networked through direct connection to PROFINET IO networks
- Rapid diagnosis by means of remote access prevents downtimes
- Standardized integration in PLC controllers, thanks to GSDML generic station description
- Largest protective field range in the market increases the variety of application possibilities
- Quick recommissioning via configuration memory
- Easy installation, commissioning and maintenance for stationary and mobile applications
- Decades of proven safety technology guarantee maximum reliability and availability - even under difficult conditions



Applications

Hazardous area protection (vertical):	✓
Access protection (vertical):	✓
Hazardous area protection (horizontal):	✓

Functions

Number of simultaneously monitored protective fields:	2
Static protective field switching:	-
Incremental encoder inputs:	-
External device monitoring (EDM):	-
Integrated configuration memory:	✓

Expanded measured data output (CMS, RS-422): -
Measured data output (RS-422): -
Safe SICK device communication via EFI/SDL: -

Technical data

Laser class: 1 (21 CFR 1040.10 and 1040.11, DIN EN 60825:2001)
Enclosure rating: IP 65 (EN 60529)
Protection class: III (EN 50178)
Type: Type 3 (IEC 61496)
Safety integrity level: SIL2 (IEC 61508), SILCL2 (EN 62061)
Category: Category 3 (EN ISO 13849)
Performance level: PL d (EN ISO 13849)
PFHd: $8.0 \cdot 1E-08$ (EN ISO 13849)
TM (mission time): 20 a (EN ISO 13849)
Ambient operating temperature: -10 °C ... 50 °C
Dimensions (W x H x D): 155 mm x 185 mm x 160 mm
Weight: 3.3 kg
Scan angle: 190 °
Protective field range: 4 m
Maximum warning field range: 49 m
Number of field sets: 4¹⁾
Number of monitoring cases: 4
Response time: 60 ms²⁾
Resolution: 30 mm, 40 mm, 50 mm, 70 mm, 150 mm, configurable
Distance measuring range: 49 m
Number of multiple samplings: Configurable 2 ... 16
Electrical connection: Copper conductor (2 sockets for RJ-45 push-pull plug), system plug with or without connecting cable
Supply voltage: 16.8 V DC, 24 V DC, 28.8 V DC
Configuration and diagnostics interface: RS-232
Device properties: PROFINET IO device with 2-port real-time switch according to PROFINET specification V2.2
PROFIsafe profile with 6-octet input and 6-octet output according to IEC 61784-3-3 V2.4
Cycle time 4, 8, 16, 32 ms, etc.
GSDML according to GSDML specification V2.25
Switch properties: Filtering Data Base according to IEEE 802.1D
6 prioritization levels for IEEE 802.1Q - Network prioritization
64 KB SRAM memory for caching telegrams, managed in 768-byte segments
Resource prioritization for network control and RTC2/3 frames
Telegram extension based on "Cut-through"
Port status (Disabled, Blocking, Forwarding)
Support for non-real-time and real-time data transfer
Port properties: Auto-negotiation
Auto-crossover (MDIX)
Auto-polarity
100Base-TX
Conformance: Conformance Class B
Topology support: SNMP, MIB-2, LLDP nach IEEE 802.1AB
MRP client support
Diagnostics: Application-related manufacturer-specific channel diagnostics and channel diagnostics for the PROFIsafe profile, individually switchable
Report system errors
Cable diagnostics
Neighborhood alerts
Support for port statistics
I&M support from I&M0 to I&M4

Interfaces for configuration and diagnostics using CDS:


TCP port 9000 and UDP port 30718
RS-232

Functions that are not supported:

Multicast communication
Supervisor AR
MAC-pause mechanism in full duplex
Back-pressure in half duplex
Static learning
Broadcast Storm Control

- 1) 1 field set = 1 protective field and 2 warning fields 2) Depending on basic response time and multiple sampling

Dimensional drawing

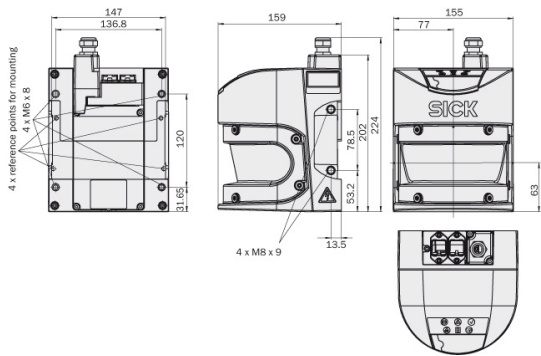

Australia

Phone +61 3 9457 0600
1800 334 802 – tollfree
E-Mail sales@sick.com.au

Belgium/Luxembourg

Phone +32 (0)2 466 55 66
E-Mail info@sick.be

Brasil

Phone +55 11 3215-4900
E-Mail sac@sick.com.br

Canada

Phone +1 905 771 14 44
E-Mail information@sick.com

Česká republika

Phone +420 2 57 91 18 50
E-Mail sick@sick.cz

China

Phone +86 4000 121 000
E-Mail info.china@sick.net.cn
Phone +852-2153 6300
E-Mail ghk@sick.com.hk

Danmark

Phone +45 45 82 64 00
E-Mail sick@sick.dk

Deutschland

Phone +49 211 5301-301
E-Mail info@sick.de

España

Phone +34 93 480 31 00
E-Mail info@sick.es

France

Phone +33 1 64 62 35 00
E-Mail info@sick.fr

Great Britain

Phone +44 (0)1727 831121
E-Mail info@sick.co.uk

India

Phone +91-22-4033 8333
E-Mail info@sick-india.com

Israel

Phone +972-4-6801000
E-Mail info@sick-sensors.com

Italia

Phone +39 02 27 43 41
E-Mail info@sick.it

Japan

Phone +81 (0)3 3358 1341
E-Mail support@sick.jp

Magyarország

Phone +36 1 371 2680
E-Mail office@sick.hu

Nederland

Phone +31 (0)30 229 25 44
E-Mail info@sick.nl

Norge

Phone +47 67 81 50 00
E-Mail austefjord@sick.no

Österreich

Phone +43 (0)22 36 62 28 8-0
E-Mail office@sick.at

Polska

Phone +48 22 837 40 50
E-Mail info@sick.pl

România

Phone +40 356 171 120
E-Mail office@sick.ro

Russia

Phone +7-495-775-05-30
E-Mail info@sick.ru

Schweiz

Phone +41 41 619 29 39
E-Mail contact@sick.ch

Singapore

Phone +65 6744 3732
E-Mail sales.gsg@sick.com

Slovenija

Phone +386 (0)1-47 69 990
E-Mail office@sick.si

South Africa

Phone +27 11 472 3733
E-Mail info@sickautomation.co.za

South Korea

Phone +82 2 786 6321/4
E-Mail info@sickkorea.net

Suomi

Phone +358-9-25 15 800
E-Mail sick@sick.fi

Sverige

Phone +46 10 110 10 00
E-Mail info@sick.se

Taiwan

Phone +886-2-2375-6288
E-Mail sales@sick.com.tw

Türkiye

Phone +90 (216) 528 50 00
E-Mail info@sick.com.tr

United Arab Emirates

Phone +971 (0) 4 8865 878
E-Mail info@sick.ae

USA/México

Phone +1(952) 941-6780
1 800-325-7425 – tollfree
E-Mail info@sickusa.com

More representatives and agencies
at www.sick.com